

► 2-Way Ceiling Speakers CSP Series

CSP 135/2-20

CSP 165/2-30

CSP 210/2-40



► 2-Way design

20/30/40W 100V

For universal use

Excellent sound quality

Powerful reproduction

Good intelligibility

Easy & quick installation

Quick-push-terminal

Protection fleece
for driver & grille

similar to Ral 9016

CE/RoHs

► **UNIelectronic**

Vertriebs GmbH
Steinbrinksweg 25
31840 Hessisch Oldendorf
Germany

Fon. +4951 52 - 52522-0

Fax. +4951 52 - 52522-11

info@unielectronic.com

www.unielectronic.com

2-Way Ceiling Speakers CSP Series



The CSP 2-way ceiling speaker series can be utilized in many applications and are provided with features that are usually not available in this price range.

The elegant look makes them fit into nearly any environment.

A protection fleece inside the grille does not only prove high attention to detail but also ensures a long term pleasant optical impression.



The high quality 2-way driver ensure a very impressive sound quality with excellent intelligibility.

The connection is done with a quick-push-terminal, that does not require any additional tools.

For the protection of the driver the rear openings are covered with a fleece that prevent the intrusion of particles. This way a long term excellent soundquality is guaranteed.

As an option the speakers are available in any RAL colour.

OEM projects welcome.

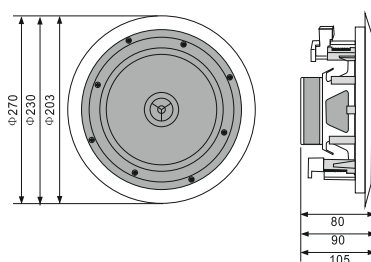

| Specifications | CSP 135/2-20 | CSP 165/2-30 | CSP 210/2-40 |
|----------------------|-----------------------|---------------------|---------------------|
| Art.-No. | 108203 | 108208 | 108214 |
| System | 2-way | 2-way | 2-way |
| Power Handling | 20W/10W/5W | 30W/15W/7,5W | 40W/20W/10W |
| Sensitivity 1 W/1m | 90 dB | 90 dB | 90 dB |
| Sensitivity SPL | 103 dB | 105 dB | 106 dB |
| Frequency response | 100Hz - 20kHz | 90Hz - 20kHz | 60Hz - 20kHz |
| Impedance (driver) | 8 Ohms | 8 Ohms | 8 Ohms |
| Directivity | 120° | 120° | 120° |
| Connection | Quick-Push-Terminal | Quick-Push-Terminal | Quick-Push-Terminal |
| Installation height | 80 mm | 90 mm | 105 mm |
| Installation cut-out | Ø 170 mm | Ø 200 mm | Ø 245 mm |
| Installation | 4x quick-mount-clamps | | |
| Color | similar to RAL 9016 | similar to RAL 9016 | similar to RAL 9016 |
| Weight | 1,6 Kg | 2 Kg | 2,5 Kg |